

FR 68

Flat recessed luminaire round FR 68-LED 4W




Description:

LED recessed spotlight with planar light, plastic housing, connecting cable 2.5m with LED 24-plug, light color extra warm white approx. 2700K, quick and easy installation with snap-in hooks, optional accessories: dim controller with remote control, DALI or 1-10V dimmer, mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole

Connection: LED-Trafo DC 24 V
Life: L70/B10 >= 50.000 h
Light colour: 2700 K extra warm white
Beam angle: 110°
Energy efficiency: LED: 113 lm/W; luminaire: 270 lm (68 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 93
Symbols: CE, MM, UL, IP44, SK III
Weight: 0,07 kg

Special features:

- flush mounting in 16 mm panels
- no visible luminous spots

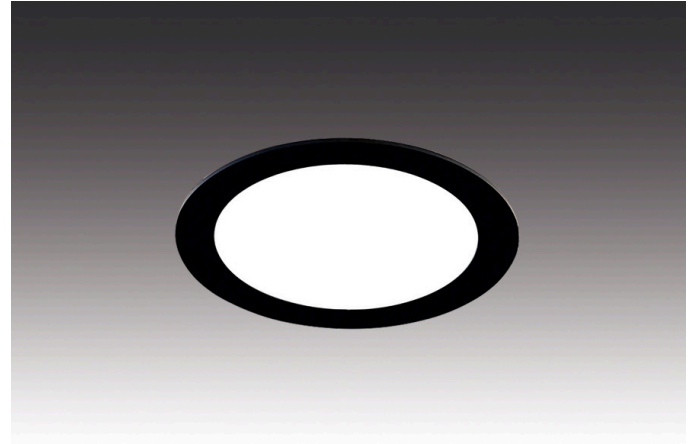

FR-/FQ 68/78

	110°	Ø	xw	ww	nw
0,5m		620	416 lx	440 lx	440 lx
1,0m		1240	104 lx	110 lx	110 lx
1,5m		1860	46 lx	49 lx	49 lx
2,0m		2480	26 lx	28 lx	28 lx
2,5m		3100	17 lx	18 lx	18 lx

Drilling hole



68mm

