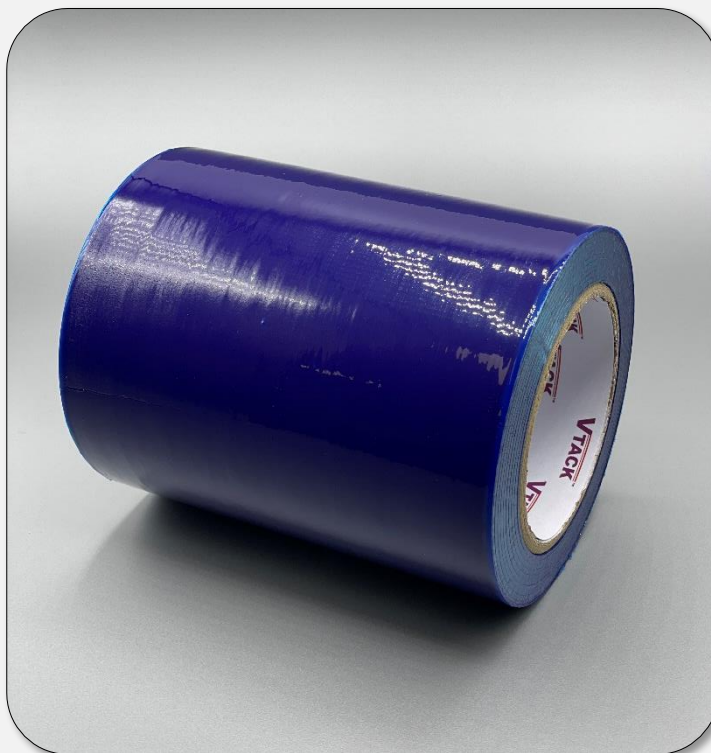


DESCRIPTION:

The 911V VTACK™ Blue PE Protection Film is a blue tinted, 60-micron, PE protection film with a coating of acrylic adhesive. The product adheres well to a range of surfaces including glass, laminates, painted surfaces, benchtops and aluminium. Excellent weather ability, stable medium tack adhesive strength with UV resistance for up to 6 months.

**APPLICATIONS TECHNIQUES:**

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

PROPERTIES	UNIT OF MEASURE	VALUES & CHARACTERISTICS
Environment Condition Temperature	°C	20 ± 10%
Atmospheric Pressure	mmHg	760 ± 5%
Relative Humidity	%	80 ± 10%
Backing Material	-----	PE
Thickness of film	mm	0.047
Thickness of glue	mm	0.003
Type of Adhesive	----	Acrylic Solvent
Total Thickness	Mm	0.06
Backing tensile strength	Kgf/25mm	2.365
Adhesion	G/25mm	150 ± 10%
Unwinding Force	G/25mm	50 ± 10%
Static Shear 23°C	Hours	>48
Elongation at break	%	>300
Outdoor Life / UV Resistance	Months	6

PRODUCT SIZE:

- 1200mm x 100mtr (custom sizes available upon request).

SURFACE PREPARATION:

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is being applied must be clean, dry, free of any dirt, grease, oil or other contaminants.

STORAGE & SHELF LIFE:

- 12 months when stored at 21°C (70°F) / 50% relative humidity out of direct sunlight.

The technical information, recommendations and other statements contained in this document are based upon tests or experience that AFC believes are reliable, but the accuracy or completeness of such information is not guaranteed. The information supplied herein is presented in good faith and believed to be accurate to the best knowledge of the supplier. It is also predicated on normal use of the product. However, since conditions of use are beyond our control, we make no warranties, expressed or implied as to the use of this information or to the suitability of product for a particular purpose.

Limited Warranty: For a period of 12 months from the date of sale, AFC Industries Pty Ltd warrants this product to be free from defects in materials and workman ship. Our only obligation will be to replace any portion providing defective, or at our option, refund the purchase price thereof. The user assumes all other risk, if any, including injury, loss or damage, direct or consequential, arising out of the use, misuse, or the inability to use this product. This warranty is in lieu of the warranties of merchantability, fitness for purpose, and all other warranties, expressed or implied. No deviation is authorised. E&OE.