

Nothing less than everything: **AVENTOS HKi**



Discover hidden forces


What if the beauty of a stay lift came from the outside and the force from within? Thanks to its narrow and compact design, AVENTOS HKI can be fully integrated into the cabinet side. The stay lift fitting blends seamlessly into the furniture and opens up new design possibilities with high aesthetic quality. You get pure and unadulterated furniture with complete design freedom. Nothing less than everything.

AVENTOS HKI



Contents

- 4 Visible elegance
- 6 Applications
- 10 Design possibilities
- 12 Quality of motion
- 14 moving ideas



Visible elegance meets concealed sophistication

AVENTOS HKi is unique in that it blends seamlessly into furniture, regardless of the type of front. So even if you use wall cabinet fronts with clear glass inserts, it will be concealed from view when the cabinet is closed. When open, lever arms emerge in onyx black. They merge beautifully with dark surfaces or create visual impact in light-coloured furniture.

Watch the product video
and find out more here:
www.blum.com/aventoshki



Elegant presentation

A cabinet is much more than a storage place for useful items. With attractive glass fronts, it is a presentation area for everything special. No matter the room, AVENTOS HKi is always an eye-catcher with which you can effortlessly impress your guests.

Minimalist design

Of course, the kitchen is a work area that should be designed as practically as possible. However, that doesn't mean you can't set an example for exceptional design. If you like minimalist style, you will love the integrated AVENTOS HKi fitting. Everything is possible – ergonomics combined with a minimalist design!

All AVENTOS benefits included

- Enhanced ease of use of wall cabinets
- Easy access to storage items
- Variable stop ensuring that the front will hold in the desired position
- Full freedom of movement
- Perfect alignment of base unit and wall cabinet gaps
- Increased quality and functionality of the furniture



Side panel thickness

16-25 mm

AVENTOS HKi is so compact that it will fit into cabinet sides that are just 16 mm thick. You are also spoilt for choice when it comes to cabinet dimensions. All standard dimensions are covered: for cabinets up to 600 mm high and 1800 mm wide.



A world full of possibilities



Be it fronts made from wood, MDF, glass with narrow or wide aluminium frames.

Easy opening, soft and effortless closing

Motion technologies by Blum deliver enhanced user convenience to AVENTOS HKi. The TIP-ON mechanical opening system gives you one-touch opening. And fronts will close softly and effortlessly with BLUMOTION which is integrated into the lift mechanism.





We believe that ideas can move the world. We offer innovative fittings, inspiring furniture concepts and appropriate services so that you can turn your creative ideas into reality. We are driven by your needs, international trends and our shared vision of a better quality of living. Let us work together to create moving ideas.



Quality of living

We would like you to enjoy greater convenience and functionality when using furniture.



Product range

Everything from a single source: our wide range of products allows you to keep up with today's and tomorrow's trends.



Inspiration

We monitor global trends and strive to create the solutions of tomorrow. We like to share our insights with you.



Innovation

We stay in motion. Curiosity and pioneering spirit drive us to develop new products and services for you.



Services

We support your daily operations with customised services tailored to your processes.



Quality

We continuously strive to improve our products, services and ourselves.



Trust

We take responsibility for partnerships, our employees, society and the environment.

Julius Blum started our journey in 1952 with horseshoe studs. Today we supply innovative fittings to customers in over 120 countries.

“

**Let your visions
be bold and believe
that the glass
is never empty.**

”

**Nothing less
than everything:
AVENTOS HKi**



www.blum.com

blum

Making space for creativity

Sometimes you have to take away to get more. With AVENTOS HKI, it's about removing 750 cubic cm of material from a cabinet side. What you get is enormous design freedom to realise new cabinet ideas with stay lift fronts. 750 cubic cm doesn't sound like much and is roughly equivalent to a glass of sawdust. And yet it is quite a challenge. For you, it's about creating the recess in the cabinet side. For us, about fitting a complex mechanism packed with functionality and convenience into a small space. We've done our bit: Our developers have put all their passion and creativity into the design of the new fitting. And we've thought about your bit too. We offer a wide range of options for manufacturing and installing our concealed lift system: a special assembly device, pre-routed raw boards or templates for routing out recesses yourself. It's never been easier to take away and get more!


Contents

- 4 Manufacturing
- 8 Installation
- 12 Ordering information
- 17 Services

Choose the right manufacturing process for you

If you prefer to work in your workshop using a CNC machine or router, you can choose from a wide range of manufacturing options to implement AVENTOS HKi. You can opt for a semi-integrated application with a cover cap or a variety of fully integrated applications, e.g. using a two-piece panel or multi-stage milling with an insert panel.

Based on your preferred method, you can select from other individual assembly options. Please get in touch with your Blum Area Manager for further support.

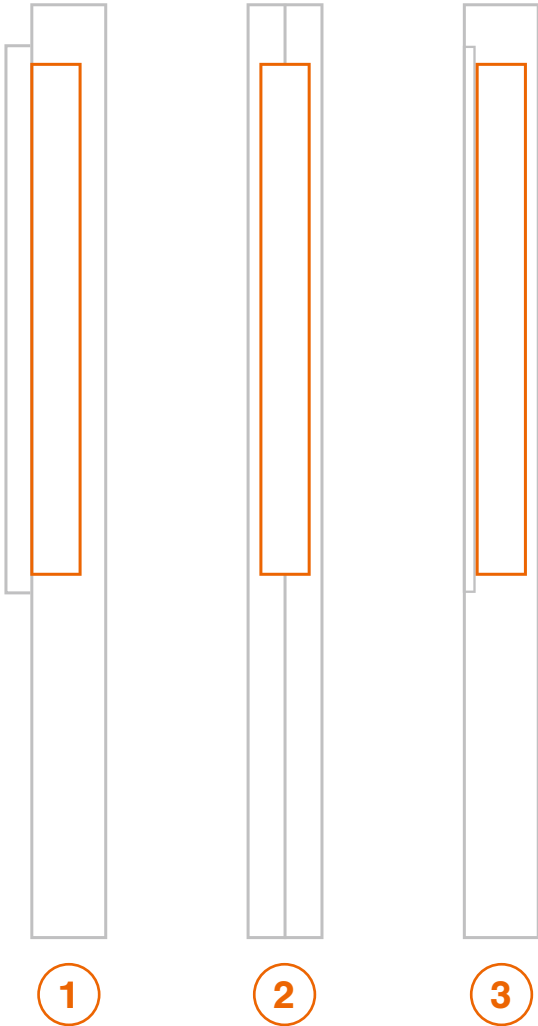

Templates for precise routing
We have not only developed a special copy router but also various routing templates so that you can precisely route a recess in the side panel for the lift mechanism and insert panel.

Customisation with cover caps

It is very easy to add customised branding with the semi-integrated application of the lift mechanism. Simply route a recess in the surface of the side panel, insert AVENTOS HKi with a matching coloured cover cap and add the desired branding element, and that's it!





Pre-routed raw boards set

Do you prefer to outsource as many work steps as possible? Then simply order an MDF raw board set, which already has the central recess for AVENTOS HKi. Cut the raw board measuring 600 mm x 450 mm x 19 mm to your desired size and attach facings or varnish the raw board according to your requirements. A spacer is inserted in the recess, providing protection during transportation and making assembly easier for you.

Milling with MINIMILL

Would you like to manufacture AVENTOS HKi in larger quantities? We have developed a special machine called MINIMILL which allows you to route a central recess in side panels that are 16-25 mm thick quickly and precisely.



**Slide-in**

Step 1: Slide the lift mechanism completely into the recess.


Slide-in, secure, clip on

Everything has been carefully considered: the installation of AVENTOS HKi is very convenient. Simply insert the lift mechanism into the central recess. The lift mechanism is secured by using a feed-out system with the turn of a screw. Clip on the front and use the three dimensional adjustment feature to produce perfect gap alignment. The cabinet will remain intact should removal ever be required.



Watch the assembly video here:

www.blum.com/hkiassembly

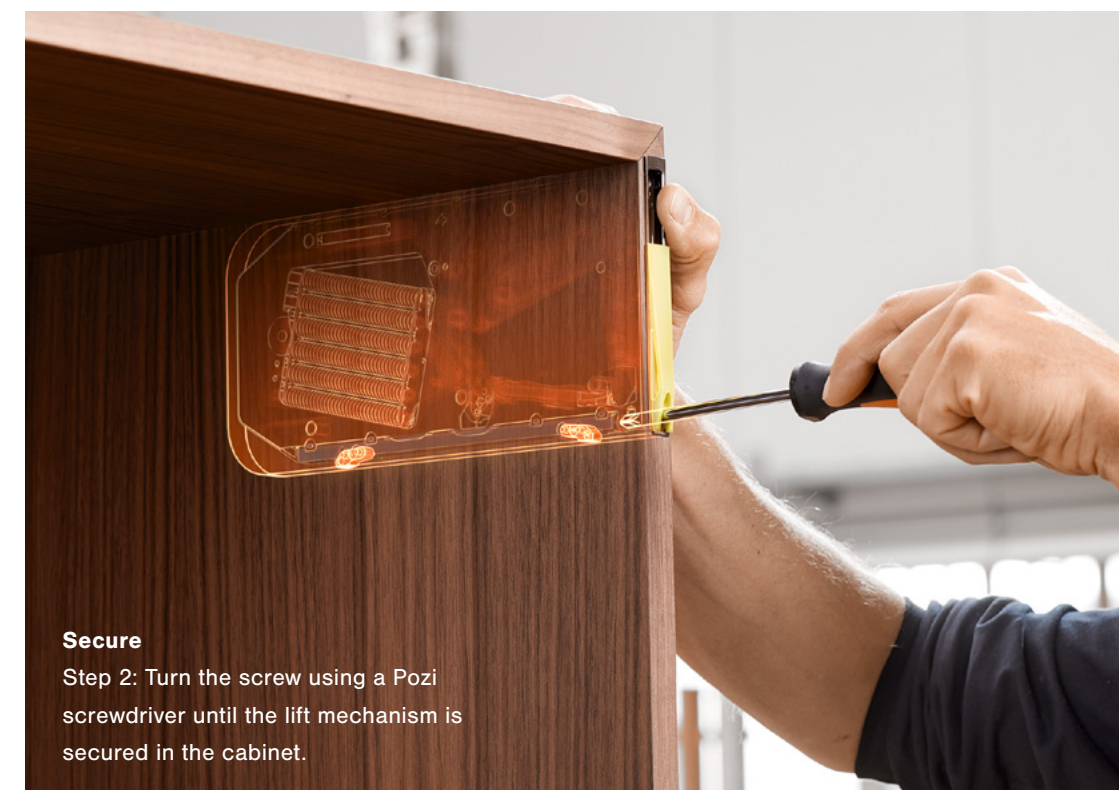**Secure**

Step 2: Turn the screw using a Pozi screwdriver until the lift mechanism is secured in the cabinet.

**Clip on**

Step 3: Clip on and adjust the front.

Familiar ease of installation

AVENTOS HKi offers all the convenience that you are used to when installing AVENTOS fittings. Despite its compact and narrow design, the fitting has all the familiar functionalities: lift mechanism adjustment from the front, integrated opening angle stop and three dimensional adjustment.



Our EASY ASSEMBLY app provides all the information you need for quick and easy installation and adjustment

www.blum.com/eaapp

Three-dimensional adjustment

Adjust the front in all three dimensions using a Torx 8 screwdriver - for a harmonious gap layout.

Integrated opening angle stop


The integrated opening angle stop allows you to adjust how far the front should open. Adjusted with a Torx 8 screwdriver.


Lift mechanism adjustment from the front

With a cordless drill, adjust the lift mechanism to the weight of the furniture front from the front of the cabinet.

Ordering information

Fully integrated lift mechanism installation

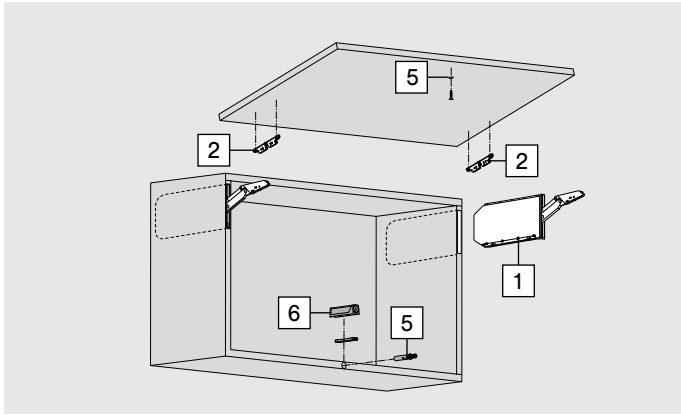


1	Lift mechanism set		
	LF	OW	
	420–1610	107°	24K2300
	930–2800	107°	24K2500
	1730–5200	107°	24K2700
	2600–7800	107°	24K2800
Consisting of:			
2 x	Symmetrical lift mechanism in onyx black		
LF	Power factor		
OW	Opening angle (infinitely variable adjustment)		
Note: Max. front weight 18 kg with two lift mechanisms!			


Power factor (LF) = cabinet height (KH) [mm] x front weight incl. double handle weight [kg]

Using the power factor, you can calculate the number of required lift mechanisms. The power factor required depends on the weight of the front (incl. double the handle weight) and cabinet height. When using a third lift mechanism (a power factor increase of up to 50%), we recommend a trial application.
Note: We recommend an additional lift mechanism attached to the centre panel for wide cabinets. The reason for this is to prevent the front from sagging when open. A trial application is recommended when you are in a borderline area of the individual lift mechanism.





2	Symmetrical front fixing bracket		
	Colour	Onyx black	
	Fixing method	EXPANDO 5 mm	
		2 x	24K42E1
	Version	Narrow and wide alu frames	
		2 x	24K4201A

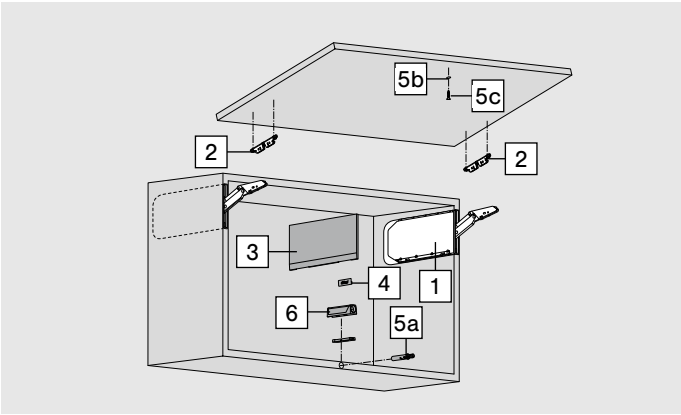

3	Cover cap set		
	Material	Colour	
	Nylon	HGR, SW, TGR	24K8000
	Branding element stamped with Blum logo in in-mould brushed stainless steel ABD.1009.BT pre-mounted		
Required for the semi-integrated lift mechanism installation only			

Semi-integrated lift mechanism installation



1	Lift mechanism set for TIP-ON		
	LF	OW	
	420–1610	107°	24K2300T
	930–2800	107°	24K2500T
	1730–5200	107°	24K2700T
	2600–7800	107°	24K2800T
Consisting of:			
2 x	Symmetrical lift mechanism in onyx black		

4c		Branding element (optional)		
	Material	Nylon		
		MOQ		
	Customised, printed branding element	From 1000pcs.		
	Customised, embossed branding element	From 5000pcs.		

5		TIP-ON Set	
	For drilling	Material	Colour
		Nylon	SW, CS
	Version	Cabinet height KH (mm)	
	Short version	Up to 600	956.1004
Consisting of:			
5a	1 x	TIP-ON	
5b	1 x	Screw-on catch plate	
5c	1 x	Chipboard screw 609.1500	
-	1 x	Glue-on catch plate	
6		Adapter plate	
	Screw-on	Material	
		Nylon	
	Straight adapter plate		
	Version	Colour	
	Short version	SW, CS	956.1201
Assemble using Ø 3.5 mm or Ø 4 mm chipboard screws. TIP-ON must be ordered separately.			

Colour	
HGR	Light grey
SW	Silk white
TGR	Dark grey
CS	Carbon black
IN-G	In-mould brushed stainless steel



Our Product Configurator makes it easy for you to choose your products.
www.blum.com/configurator

Accessories


MINIMILL	
	For fully integrated lift mechanism installation with side panel thicknesses of 16–25 mm
	The MINIMILL is not a stocked item in Blum Australia and is available as a special order only, contact Blum Australia customer service for more information.
Consisting of:	
1 x	MINIMILL
2 x	Chain
Optional for MINIMILL	
	Chain
	Extension ruler

Optional




Raw boards set, pre-routed	
	2x MDF raw boards 600 x 450 x 19 mm moisture resistant including spacers
	Full integration
24K7100	
Recess drill, 4 mm	
	To expose the central recess after facings have been applied to the raw board
	Full integration
M45.ZF04	
Routing templates set	
	Routing template for lift mechanism, routing template for insert panel, base plate
	Full and semi-integration
65.5840	
Copy router 19 mm	
	Ideal in combination with routing templates set
	Full and semi-integration
	Cutting insert set for copy router
	10x cutting inserts
M34.ZW50	
Spacer set	
	2 pcs, as transport and assembly protection
	Full integration
M45.1010	

Planning

Fully integrated lift mechanism installation

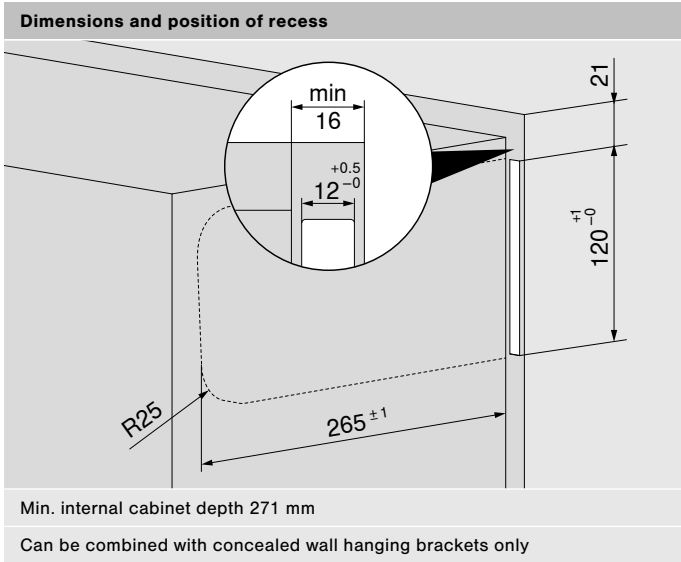




Semi-integrated lift mechanism installation

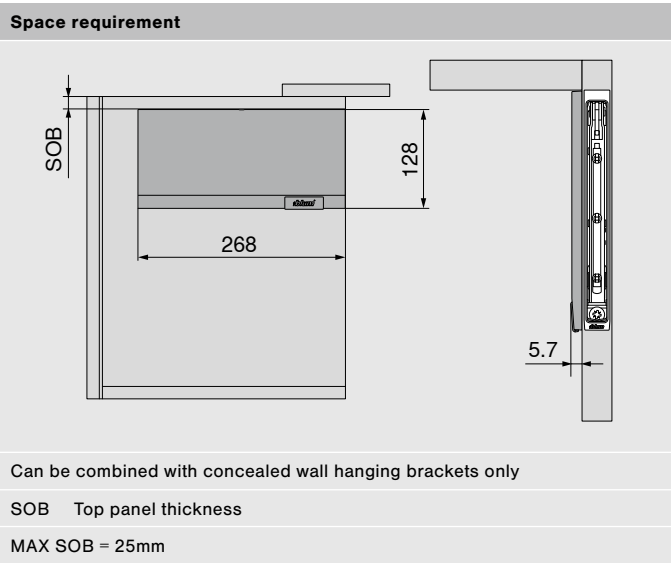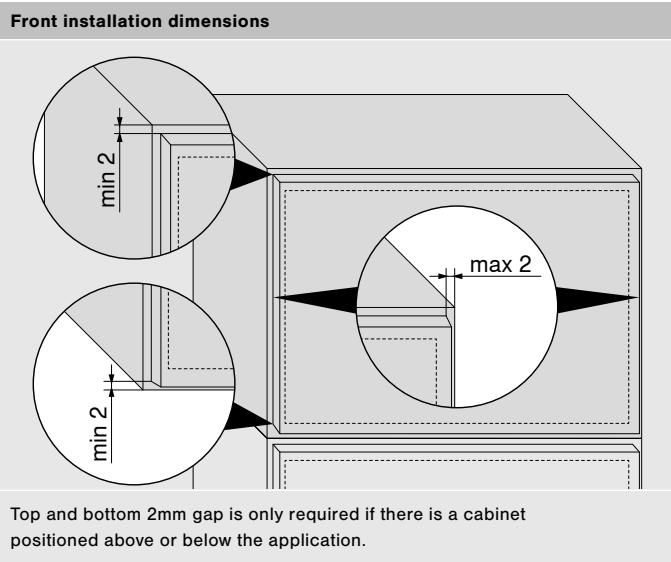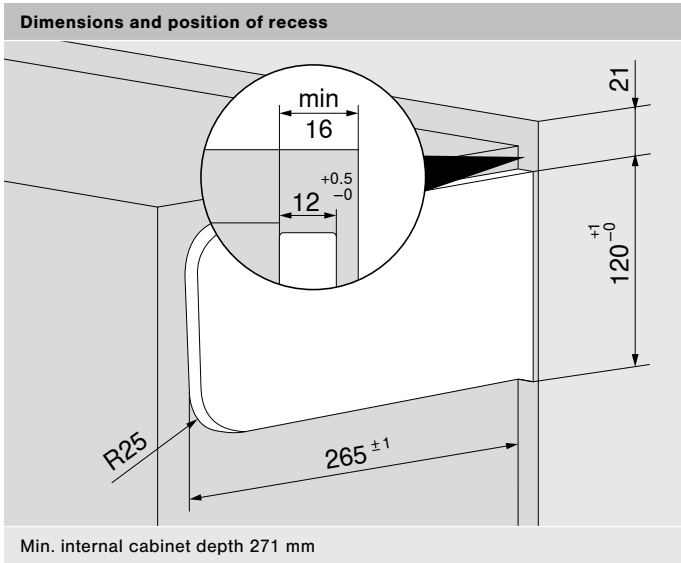

Configure AVENTOS HKi in the
Cabinet Configurator with just a few clicks.
blum.com/cabinetconfig

Planning


Front assembly

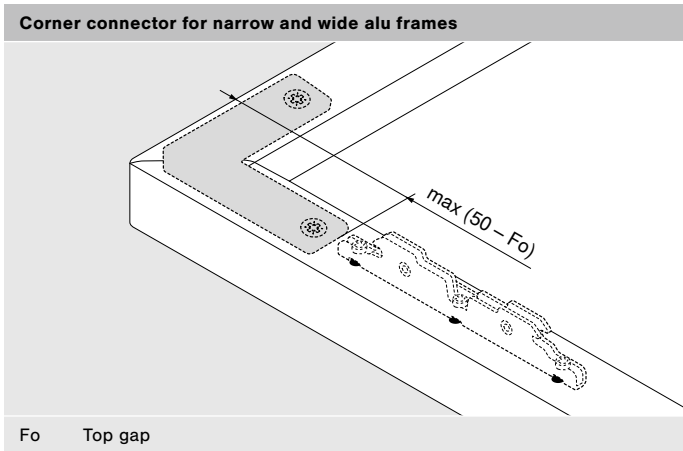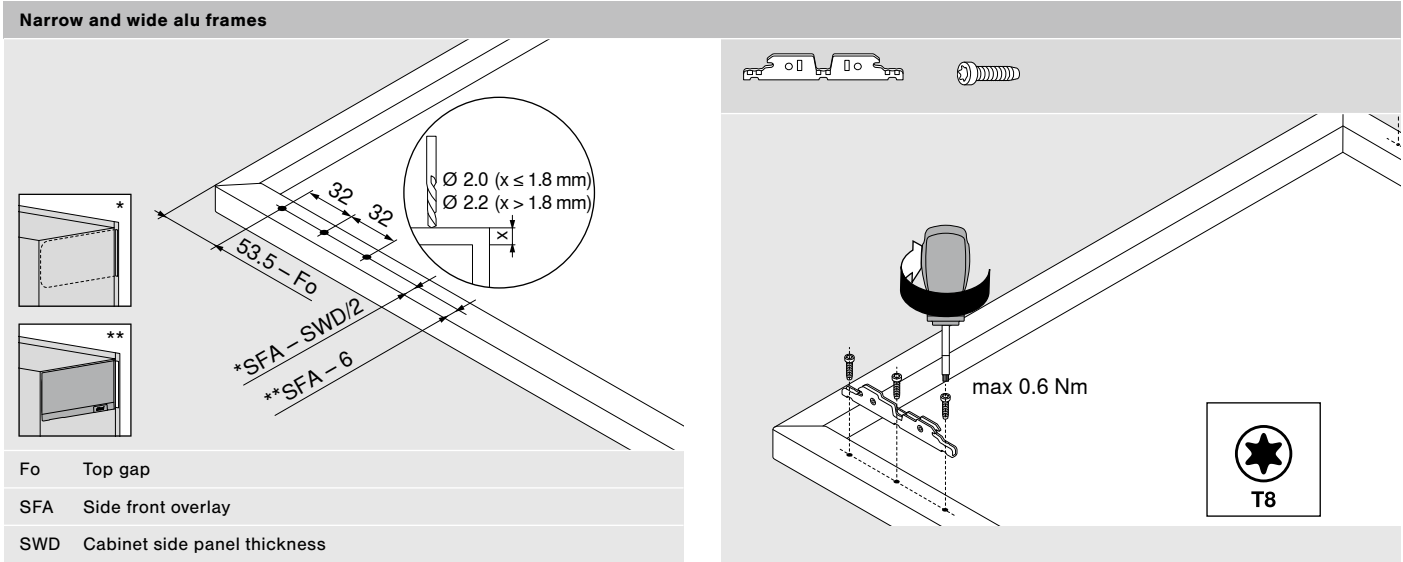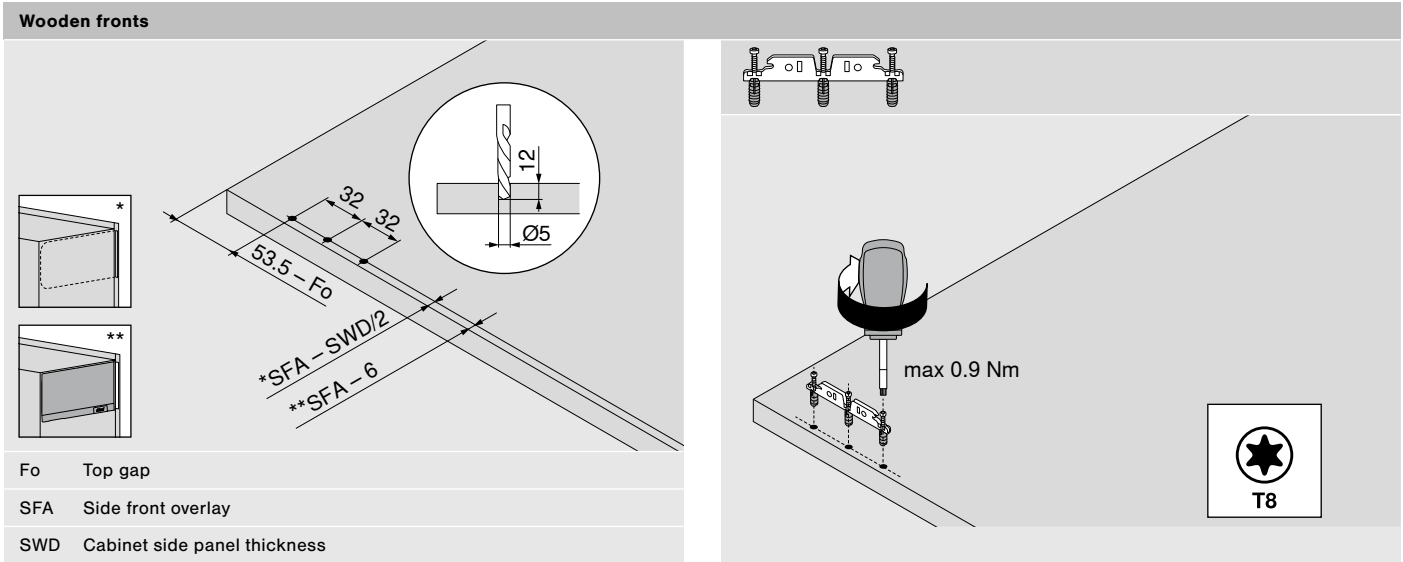

Planning

Space requirement

Space requirement – Cornice | Crown moulding

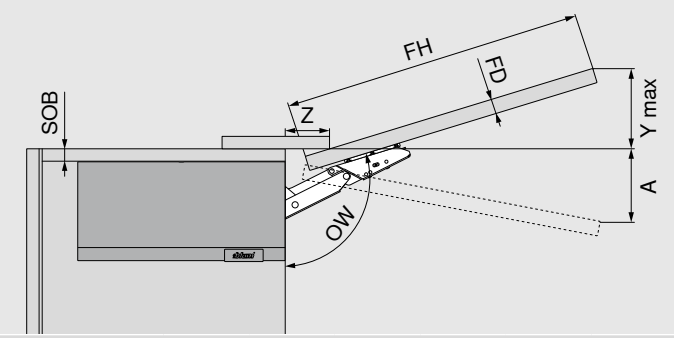

Space requirement (mm)

At max. opening angle


$Y\ max = FH \times 0.29 - 32 + FD$

$A = FH \times 0.26 + 28 - FD$ with opening angle stop

FD (mm)	16	18	19	20	22	26
Z (mm)	70	63	59	57	49	35

SOB	Top panel thickness
FD	Front thickness
FH	Front height
OW	Opening angle

Minimum gap

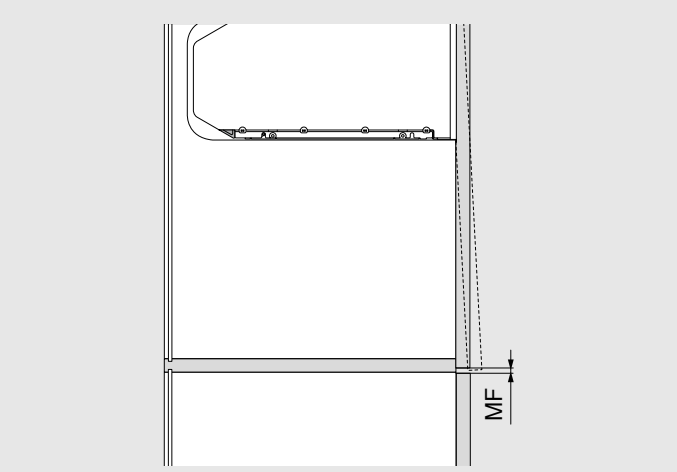

Minimum gap MF is 2mm if there is another cabinet below



Our EASY ASSEMBLY app provides all the information you need for quick and easy installation and adjustment

www.blum.com/eaapp

Marketing

You will find professional photos, videos, brochures and presentations on AVENTOS HKi in the Marketing Media Library. Get some fresh inspiration and use our marketing material to persuade your customers in sales conversations.

Concept, planning, quotation

Plan, configure and save your AVENTOS HKi projects online with ease – with our free configurators. This enables you to obtain checked and complete parts lists for your customer quotes.

Design

The Cabinet Configurator helps you to design cabinets and displays them in 3D. You can find the corresponding AVENTOS HKi options using the integrated Product Configurator. Our CAD/CAM Data Service provides you with data in the most common formats for your design software.

Supporting you every step of the way

We at Blum will support you along the entire process chain – from marketing, planning and product selection right through to after sales service. Take advantage of our user-friendly services for your projects with AVENTOS HKi.

Ordering

Simply transfer your parts lists from the Cabinet and Product Configurator directly to your distributor's web shop. In order to speed up your AVENTOS HKi configurations, you can manage your different projects and templates with ease under "My projects" or "My library".

Manufacturing

Use our configurators and appropriate assembly devices to accelerate your production process. Use our templates or MINIMILL for AVENTOS HKi.

Installation

Do you want to install and optimally adjust our fittings? The EASY ASSEMBLY app for smartphones and tablets answers any questions you may have about assembly and adjustment. It contains installation instructions and videos for all our products.

After sales service

We are delighted to provide you with continued support after you purchase AVENTOS HKi. Your contact at Blum will be happy to answer any questions you might have about our products and services.



For more information about our services, go to:

www.blum.com/e-services

 **Instagram:**
@blumaustralia, #blumaustralia

 **Facebook:**
facebook.com/blumaustralia

 **LinkedIn:**
linkedin.com/company/blum-australia

 **TikTok:**
tiktok.com/@blumaustralia

 **Pinterest:**
pinterest.com/blumaustralia/

 **Android App on Google Play:**
Easy Assembly App

 **Available on the App Store:**
Easy Assembly App

Blum Showrooms
Sydney (Head Office)

10 Blackbird Close
Len Waters Estate NSW 2170
Ph: 02 9612 5400

Adelaide

179 Railway Terrace
Mile End SA 5031
Ph: 08 8118 6070

Brisbane

6/39-45 Compton Road
Underwood QLD 4119
Ph: 07 3135 9490

Melbourne

245 Ferntree Gully Road
Mount Waverley VIC 3149
Ph: 03 9982 1720

Perth

3/425 Scarborough Beach Road
Osborne Park WA 6017
Ph: 08 6467 0110

Blum Australia Pty Ltd
PO BOX 1615
Green Valley, NSW, 2168
Australia
Toll Free: 1800 179 186
E-mail: info.au@blum.com
blum.com

